

14 years
World No.1


JACK

JK-1500E

Step Straight High-Speed Interlock Sewing Machine

- Smooth, stable, and durable thread trimming
- Handles both thin and thick fabrics with neat stitches
- Versatile for multiple processes
- Spacious work area for smooth operation



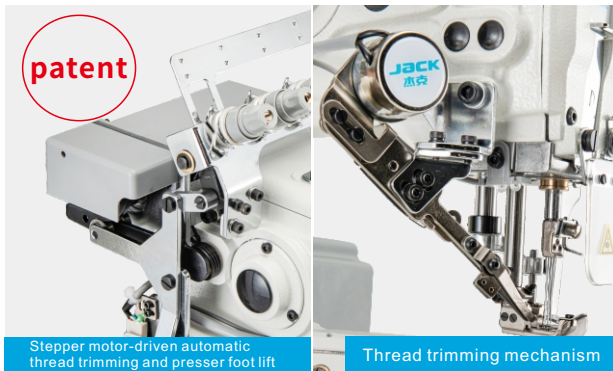

1 Lightweight, precise trimming

70% faster trimming efficiency, 8dB noise reduction. Durable design eliminates issues of weakening electromagnetic trimmer force.



2 Maximum presser foot lift

10mm. Consistently neat stitches without skipped needles—from ultra-thin hosiery to sportswear seam sewing.



3 Multifunctional

Performs seam sewing, top/bottom tape attaching, hemming, and 4-needle 6-thread cover stitching. Adapts to diverse technical needs.

4 Generous workspace

Easily handles cuffs and collars. Optional extra-long straight bar (450mm) available

parameter

model	NEEDLE SIZES	Number of lines	Number of stitches	Stitch length	Differential Ratio	Presser foot height	Needle bar stroke	Maximum speed (S.p.m)	Automatic thread cutting	Foot Lift Up	Upper cutting knife	volume (mm)	weight(mm)
JK-1500E-156M-UT	#11	5	3	1.2-4.5	1:0.7-1:2	8	31.5	4000	√	√	√	62. 8x53. 5x57	51/58
JK-1500E-156M-UT2	#11	4	3	1.2-4.5	1:0.7-1:2	10	31.5	4000	√	√	×	62. 8x53. 5x57	51/58
JK-1500E-464M-UT	#11	6	4	1.2-4.5	1:0.7-1:2	8	31.5	4000	√	√	√	62. 8x53. 5x57	51/58
JK-1500E-156L-UT	#11	5	3	1.2-4.5	1:0.7-1:2	8	31.5	4000	√	√	√	68. 5x51x66	53/62
JK-1502E-164M-DT	#11	4	3	1.2-4.5	1:0.7-1:2	10	31.5	4000	×	√	×	62. 8x53. 5x57	51/58
JK-1502E-164M-D	#11	4	3	1.2-4.5	1:0.7-1:2	10	31.5	4000	×	×	×	62. 8x53. 5x57	51/58

Computerized machine without top cutter;DT: Single presser foot lift;D: Direct drive;M: 280mm standard version; L: 380mm long-arm version