

JACK 杰克

快速服务100%

股票代码

603337

JK-5559F-W

Side cutter stepping computer lockstitch sewing machine

Stepper motor control, high efficiency and quiet

German industrial design, unique vision, natural, excellent workmanship, and extreme details.



2021年12月版

JACK SEWING MACHINE CO.,LTD.

No.1008, Donghai Road East, Jiaojiang District, Taizhou city, Zhejiang, China.

TEL: 0086-576-88177782 88177767

FAX: 0086-576-88177787



Jack Wechat




Jack Facebook




1 Accurate stitch length, stable and reliable

The stepping motor controls the stitch length to an accuracy of 0.1mm, the stitch length is accurate, the quality is high, and the stitch length can be locked to avoid the difference in the length of the stitch length caused by misoperation.

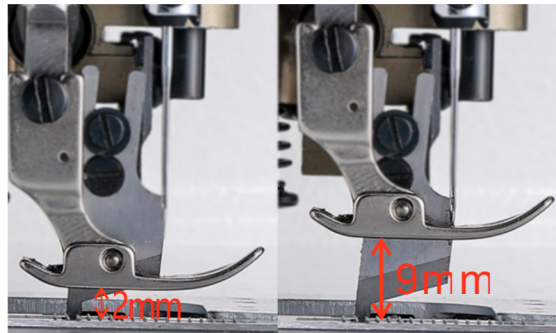


3 Germany design, Unique image, precise details

The height of the presser foot can be adjusted within the range of 0-9mm basing on the thickness of the fabric, saving time and convenience.

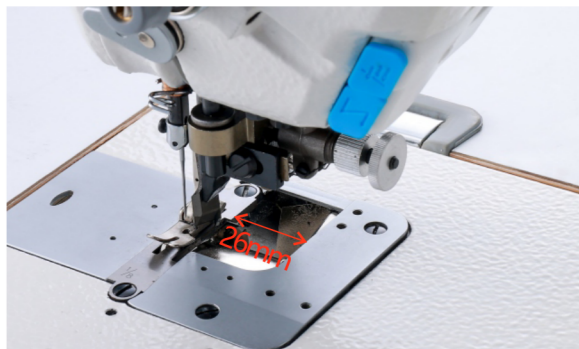


5 26MM blanking space

The leftover material slides naturally from the blanking port, keeping the sewing table fresh and clean at all times.

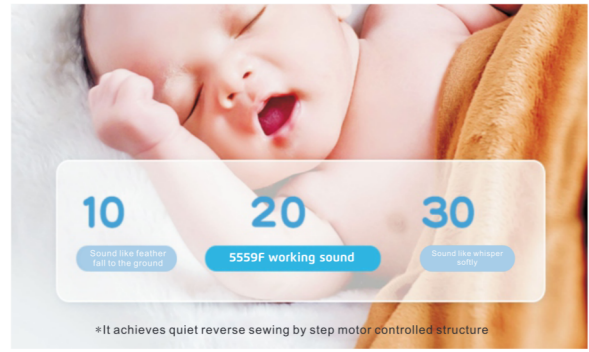

2 Stepper motor control, the sound is lighter

Scientific design, through the stepping motor to control the reverse stitching and presser foot lifting, realize the reverse stitching and presser foot lifting silently, giving you a quiet and comfortable working environment.

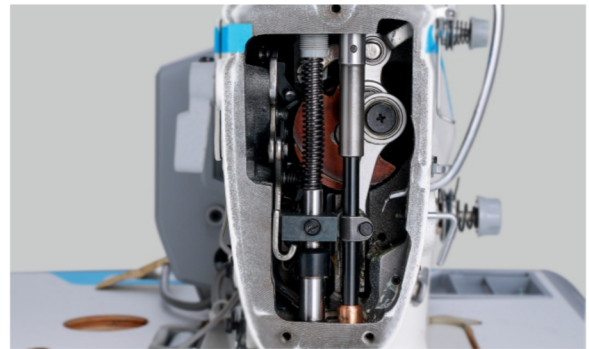

4 No oil on the head, clean and environmentally friendly

The head is lubricated with imported high-quality mineral grease and equipped with a bearing-type thread take-up lever to completely solve the trouble of oil pollution and clean sewing.



6 Voice prompt, one key direct

Each button has a detailed voice prompt, and when a fault occurs, it can be voiced to provide a detailed solution.

Technical Parameters

机 型 Model	机针 Needle	线数 Threads	针迹长度 (mm) Stitch length	压脚高度 (mm) Height of presser foot	最高转速 (S.p.m) Max. speed	头部供油 Oil supply through head	切刀针位组	体积 (mm) Volume	重量 (kg) Weight
JK-5559F-W	DB×1 11-18#	2	5	0-9	4000	without oil	1/8	695×295×550	40/46
JK-5559F-W(1/4)	DB×1 11-18#	2	5	0-9	4000	without oil	1/4	695×295×550	40/46
JK-5558G-W	DB×1 11-18#	2	5	5-13	4000	without oil	1/8	645×248×550	32/38.7
JK-5558G	DB×1 11-18#	2	5	5-13	4000	with oil	1/8	645×248×550	32/38.7
JK-5558G-W(1/4)	DB×1 11-18#	2	5	5-13	4000	without oil	1/4	645×248×550	32/38.7
JK-5558G(1/4)	DB×1 11-18#	2	5	5-13	4000	with oil	1/4	645×248×550	32/38.7
JK-5558G-WT	DB×1 11-18#	2	5	5-13	3500	without oil	3/16	645×248×550	32/38.7
JK-5558G-T	DB×1 11-18#	2	5	5-13	3500	with oil	3/16	645×248×550	32/38.7