

**JACK**

China No.1

Shanghai stock  
listed

# JK-T373G

## Electromechanical Integrated Button Attaching Machine

- Stepping motor, easy to operate
- Easy to learn and use, better performance
- A variety of automatic button device optional



Sep. 2022 version

### JACK TECHNOLOGY CO.LTD

No. No 1008, Donghai Road East, Jiaojiang District, Taizhou city, Zhejiang, China.  
TEL : 0086-576-88177782 88177767  
FAX : 0086-576-88177787  
E-mail : sales@chinajack.com  
www.chinajack.com




Jack Wechat




Jack Facebook

JK-T373G electromechanical integrated button attaching machine, german industrial design, inherits the genes of Jack family DNA, with blue strip outlook, beautiful and unique. The stepping motor controlled presser foot lifting and thread trimmer, low voice and high efficiency. The number of stitches can be switched by one key, simple and easy to learn. Suitable for sewing thin and medium-thick materials such as shirts, coats, and work clothes.

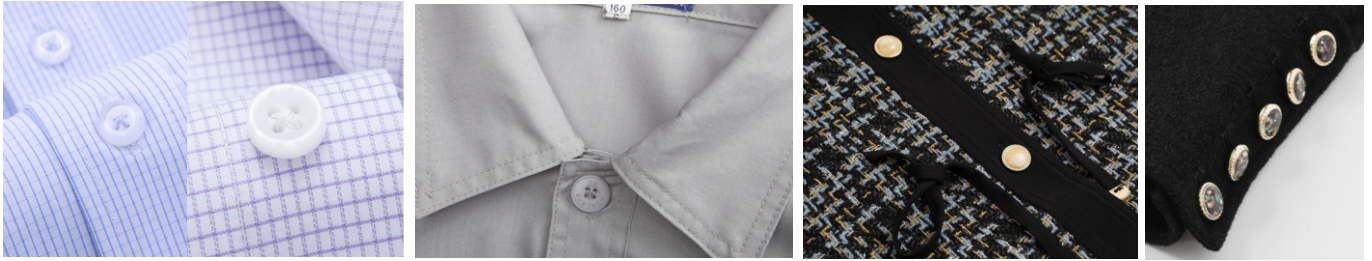

## 1 Stepping motor, easy to operate

Jack's patent technology of stepping motor driving presser foot lifting and thread trimmer, adopts closed-loop control system, make it precise control and convenient adjustment, with needle protection function to prevent needle breakage; the presser foot lifting sound is 3.5 decibels lighter than ordinary electromagnets, which solves the problem of electromagnet's weakness and durability, faster response and higher efficiency; the presser foot can also be lifted by hand-wheel in the power-off state, which is easy to adjust.

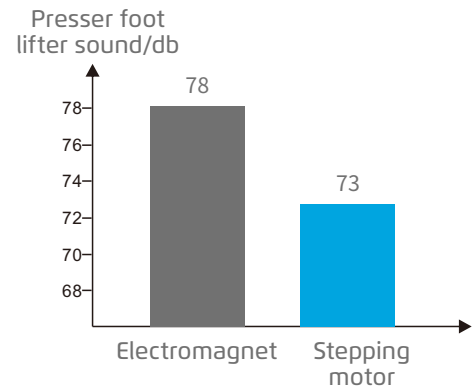

## 2 Easy to learn and use, better performance

The pattern and the number of stitches can be switched by one key, and the number of sewing stitches can be set freely by long pressing the stitch number key; through the parameter setting, the counting function can be added, convenient to calculate the output and salary



## 3 A variety of automatic button device optional (373GR/373GVR)

It can be adapted to various types of automatic button feeding devices (standard 16-bend large plate) to meet the special requirements of more customers for automatic buttoning.



## Technical parameter

Model	Needle No.	Needle qty	Thread	Button diameter	Button size	Automatic thread trimming	Automatic presser foot lift	Presser foot height	Max. rpm	Volume (mm)	Weight (mm)
JK-T373G	TQ×1 16#	1	1	10-28	X(2.5~6.5mm) Y(0.2.5~6.5mm)	✓	✓	10	1500	630 × 470 × 440	26/32
JK-T373GR	TQ×1 16#	1	1	8-25	X(2.5~6.5mm) Y(0.2.5~6.5mm)	✓	✓	13	1500	1220 × 840 × 1320	110/159
JK-T373GVR	TQ×7 16#	1	1	10-22	X(2.5~6.5mm)	✓	✓	13	1500	1220 × 840 × 1320	150/200